



# SEL-2243 Power Coupler

Every SEL Axion<sup>®</sup> node requires at least one SEL-2243 Power Coupler module. The SEL-2243 serves two purposes in an Axion system:

1. It is the power supply for all modules installed in the node, and;
2. It provides two dedicated EtherCAT<sup>®</sup> ports so that multiple Axion nodes can operate together.

## Front Panel

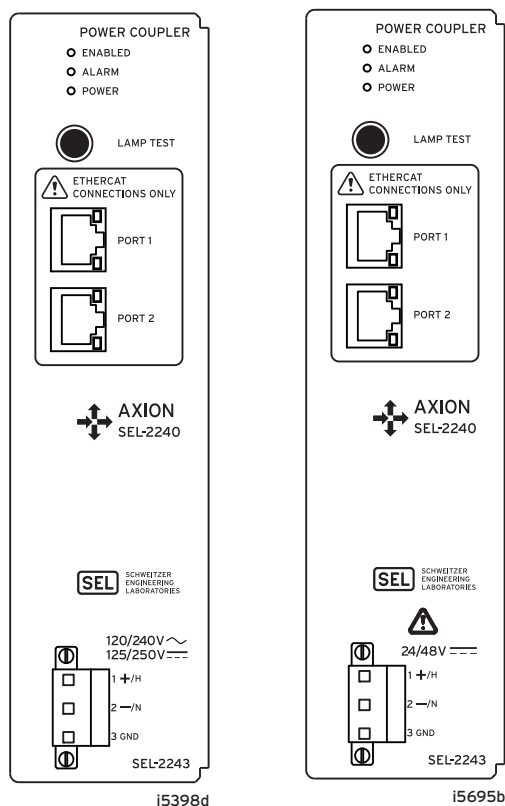


Figure 1 SEL-2243 Front Panel With RJ45 Connectors

## Power Supply Operation

One SEL-2243 has sufficient power capacity to accommodate an entire Axion node. The terminal strip at the bottom of the unit, as seen in *Figure 1*, is the connection point for incoming power. All Axion modules have a 55-position IEC C-style connector that provides a communications and power interface to the backplane. The SEL-2243 provides power to the node via the backplane connector.

The power coupler module uses the same power supply design that you would find in SEL protective relays. The Axion provides test-proven superior performance and availability, while also allowing for redundant power couplers in a node for applications that need these. If you install two power couplers in a node, both modules actively share load and provide the necessary power for node functions. If one SEL-2243 becomes unavailable, there is zero switching delay or power loss to the node.

## EtherCAT Operation

Each SEL-2243 provides two dedicated ports for EtherCAT networks. The ports will either be standard 10/100BASE-T or optional 100BASE-FX Ethernet ports. EtherCAT is a real-time fieldbus protocol (see *Appendix E* in the *ACSELERATOR RTAC SEL-5033 Instruction Manual*) that we can use to connect an RTAC to I/O modules in an Axion system. If the installation has only one node, then the backplane transmits EtherCAT messages. Alternatively, if you use an SEL-3530 RTAC, or if you need more I/O than will fit in a node, then the ports on a power coupler module provide a mechanism for extending the EtherCAT network through the use of dedicated Ethernet wiring. Refer to *EtherCAT* in *Section 2: Communications* in the *ACSELERATOR RTAC SEL-5033 Instruction Manual* to learn more about configuring a network.

If an Axion node contains two SEL-2243 modules, then the EtherCAT ports in both power couplers will operate normally even if one power supply becomes unavailable. The remaining power supply will serve as the source for all I/O modules and communications needs.


## Mechanical Installation

Each SEL-2242 chassis/backplane has ten slots, labeled A through J. Only slots A, B, and C support the SEL-2243 Power Coupler module.



**Figure 2 Notch for Module Alignment**

To install the power coupler, tip the top of the module away from the chassis, align the notch on the bottom of the module (shown in *Figure 2*) with the slot you have selected in the chassis, and place the module on the bottom lip of the chassis (*Figure 3*). The module is aligned properly when it rests entirely on the lip of the chassis.

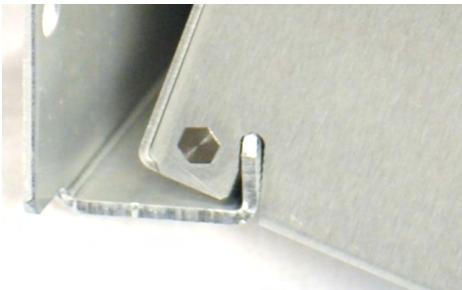

**Figure 3 Proper Module Placement**

Next, carefully rotate the module into the chassis, making sure that the alignment pin fits into the corresponding slot at the top of the chassis (refer to *Figure 4*). Finally, press the module firmly into the chassis and tighten the chassis retaining screw.



**Figure 4 Final Module Alignment**

## Connections

### General

Terminals are not intended for use with bare conductors. Solid or stranded wire can be used with ferrule or spade terminals. The customer is responsible for verifying that wire insulation and temperature ratings are sufficient for their application.

### Power

#### **⚠ DANGER**

Contact with this circuitry may cause electrical shock that can result in injury or death.

#### **⚠ CAUTION**

Capacitors should be safely discharged during decommissioning.

The power terminals on the high-voltage power coupler (1 (+/H) and 2 (-/N)) must connect to 120/240 Vac with the proper polarity or to 125/250 Vdc. The power terminals on the low-voltage power coupler (1 (+/H) and 2 (-/N)) must connect to 24/48 Vdc. The power terminals are isolated from the chassis ground. Use 14 AWG (2.1 mm<sup>2</sup>) with an external 15 A branch circuit protection device or 12 AWG (3.3 mm<sup>2</sup>) wire with an external 20 A branch circuit protection device.

### Grounding (Earthing)

Connect the ground terminal labeled **GND (3)** on the power coupler to a rack frame or switchgear ground for proper safety and performance. Use 14 AWG (2.5 mm<sup>2</sup>) wire of sufficient current capacity and insulation voltage ratings that is less than 2 m (6.6 ft) in length for the ground connection.

### EtherCAT Ports

#### **⚠ CAUTION**

Always ensure that power couplers are not connected to any Ethernet switches or other Ethernet devices, including RJ45-to-fiber-optic converters. The power coupler EtherCAT ports are only for direct connections between power couplers of the same type or to an RTAC EtherCAT port. Connecting a power coupler to any other Ethernet device can cause the EtherCAT network to stop communicating completely or have unpredictable behavior.

The SEL-2243 includes two 10/100BASE-T or 100BASE-FX Ethernet ports dedicated for EtherCAT protocol. Use a standard RJ45 connector for a copper port and an LC connector for a fiber-optic port to connect **PORT 1** or **PORT 2** of the module. Make each connection by using a direct cable to the next device. Use SEL cable SEL-C627 with copper ports. Copper cables for EtherCAT connections should be less than 3 m (10 ft) in length.

### Buttons and LEDs

Each power coupler includes a **LAMP TEST** button useful for system testing. When depressed, all module LEDs on the terminal side and front panel (rack mount only) will illuminate.

The green LED labeled **POWER** on the SEL-2243 will illuminate if incoming power is present and the power supply is operating normally. The LEDs labeled **ENABLED** and **ALARM** are related to EtherCAT network operation.

The green **ENABLED** LED will illuminate when the module is operating normally on the network. The **ALARM** LED will illuminate during network initialization or when there is a problem with the network.

## Specifications

### Compliance

Designed and manufactured under an ISO 9001 certified quality management system

UL Listed to U.S. and Canadian safety standards (File E220228; NRAQ, NRAQ7)

CE Mark

### General

#### Operating Temperature Range

−40° to +85°C (−40° to +185°F)

**Note:** UL ambient 0° to 40°C.

#### Operating Environment

Pollution Degree:	2
Overvoltage Category:	II
Insulation Class:	1
Relative Humidity:	5%–95%, noncondensing
Maximum Altitude:	2000 m

### EtherCAT Ports

Ports:	2
Data Rate:	Automatic
Connector:	RJ45 Female or LC Fiber
Protocols:	Dedicated EtherCAT

#### RJ45 Ports

Cable Length: <3 m

#### Fiber-Optic Ports (Class 1 LASER/LED)

Wavelength:	1300 nm
Optical Connector Type:	LC

#### Multimode Option

Link Budget:	11 dB
Min. TX Power:	−20 dBm
Min. RX Sensitivity:	−31 dBm
Fiber Size:	50–200 μm
Approximate Range:	2 km
Data Rate:	100 Mbps
Typical Fiber Attenuation:	−2 dB/km

#### Single-Mode Option

Link Budget:	10 dB
Min. TX Power:	−15 dBm
Min. RX Sensitivity:	−25 dBm
Fiber Size:	9 μm
Approximate Range:	15 km
Data Rate:	100 Mbps
Typical Fiber Attenuation:	−0.4 dB/km

### Power Supply

#### AC Input Voltage (High-Voltage Model)

**Note:** Single phase.

Nominal Supply Voltage: 120–240 Vac, 50–60 Hz

Operational Voltage Range: 85–264 Vac, 40–70 Hz

#### DC Input Voltage (High-Voltage Model)

Nominal Supply Voltage: 125–250 Vdc

Operational Voltage Range: 85–300 Vdc

#### DC Input Voltage (Low-Voltage Model)

Nominal Supply Voltage: 24–48 Vdc

Operational Voltage Range: 19.1–57.6 Vdc polarity dependent

**Note:** UL operational voltage range is equal to the nominal voltage range ±10 percent.

#### Fuse Rating

High-Voltage Model, F1: 3.15 A, high breaking capacity, time lag T, 250 V (5x20 mm, T3.15AH 250 V)

High-Voltage Model, F2 (Non-Serviceable): 8 A, high breaking capacity, time lag T, 60 Vdc (2.7x6.1 mm, T8A 60 Vdc)

Low-Voltage Model: 6.30 A, high breaking capacity, time lag T, 250 V (5x20 mm, T6.3AH 250 V)

#### Power Consumption

Maximum AC Burden: 160 VA

Maximum DC Burden: 75 W

#### Interruptions

30 ms @ 24 Vdc  
 130 ms @ 48 Vdc  
 50 ms @ 125 Vac/Vdc  
 100 ms @ 250 Vac/Vdc

#### Max Inrush

17 A

#### Isolation

3100 Vdc

#### Redundant Installation

Each node may have one or two SEL-2243 modules installed. When two are used, they operate in load sharing mode.

#### Recommended External Overcurrent Protection

Breaker Type: Standard

Breaker Rating: 15 A or 20 A at 250 Vdc

Current Breaking Capacity: 10 kA

Grounded Neutral System: Device in series with the HOT or energized conductor

DC and Isolated Systems: Device in series with both conductors

## Type Tests

### Environmental Tests

Enclosure Protection:	IEC 60529:2001 + CRGD:2003 IP3X excluding the terminal blocks
Vibration Resistance:	IEC 60255-21-1:1988 Vibration Endurance, Severity: Class 2 Vibration Response, Severity: Class 1
Shock Resistance:	IEC 60255-21-2:1988 Bump Test, Severity: Class 1 Shock Withstand, Severity: Class 1 Shock Response, Severity: Class 1
Seismic:	IEC 60255-21-3:1993 Quake Response, Severity: Class 1
Cold:	IEC 60068-2-1:2007 -40°C, 16 hours
Dry Heat:	IEC 60068-2-2:2007 +85°C, 16 hours
Damp Heat, Cyclic:	IEC 60068-2-30:2005 25°C to 55°C, 6 cycles, 95% relative humidity

### Dielectric Strength and Impulse Tests

Impulse:	IEC 60255-5:2000 Severity Level: 0.5 J, 5 kV power supply; 0.5 J, 1.5 kV EtherCAT ports IEEE C37.90-2005 Severity Level: 0.5 J, 5 kV power supply; 0.5 J, 1.5 kV EtherCAT ports
Dielectric (HiPot):	IEC 60255-5:2000 Severity Level: 3.1 kVdc on power supply for 1 minute; 2 kVdc on EtherCAT ports for 1 minute IEEE C37.90-2005 Severity Level: 3.1 kVdc on power supply for 1 minute; 2 kVdc on EtherCAT ports for 1 minute
Insulation:	IEC 60255-5:2000 Severity Level: 500 V for greater than 1 minute

### RFI and Interference Tests

#### EMC Immunity

Electrostatic Discharge Immunity:	IEEE C37.90.3-2001 IEC 60255-22-2:2008 IEC 61000-4-2:2008 Severity Level: 4 8 kV contact discharge 15 kV air discharge
-----------------------------------	---

Radiated RF Immunity:	IEEE C37.90.2-2004 Severity Level: 35 V/m IEC 61000-4-3:2010 Severity Level: 10 V/m IEC 60255-22-3:2007 Severity Level: 10 V/m
Digital Radio Telephone RF Immunity:	ENV 50204:1995 Severity Level: 10 V/m at 900 MHz and 1.89 GHz
Conducted RF Immunity:	IEC 60255-22-6:2001 Severity Level: 10 Vrms IEC 61000-4-6:2008 Severity Level: 10 Vrms
Surge Immunity:	IEC 60255-22-5:2008 Severity Level: 1 kV Line to Line, 2 kV Line-to-Earth IEC 61000-4-5:2005 Severity Level: 1 kV Line to Line, 2 kV Line-to-Earth
Fast Transient, Burst Immunity:	IEC 60255-22-4:2008 Severity Level: Class A: 4 kV, 5 kHz; 2 kV, 5 kHz on communications ports IEC 61000-4-4:2011 Severity Level: 4 kV, 5 kHz
Power Supply Immunity:	IEC 61000-4-11:2004 IEC 61000-4-29:2000 IEC 60255-11:2008
Magnetic Field Immunity:	IEC 61000-4-8:2009 Severity Level: 1000 A/m for 3 seconds, 100 A/m for 1 minute IEC 61000-4-10:2001 Severity Level: 100 A/m
Surge Withstand Capability Immunity:	IEEE C37.90.1-2002 2.5 kV oscillatory, 4 kV fast transient IEC 60255-22-1:2007 2.5 kV common-mode 1.0 kV differential-mode (cable length < 2 m for RJ45 power couplers)
Oscillatory Waves Immunity:	IEC 61000-4-12:2006 Ring Wave: 2 kV common, 1.0 kV differential Oscillatory: 2.5 kV common, 1.0 kV differential
Common Mode Disturbance Immunity:	IEC 61000-4-16:2002 Frequency: 0 to 150 Hz Severity: Level 4, segment 4: 30 Vrms open-circuit, 15 to 150 kHz
Emissions	
Radiated and Conducted Emissions:	IEC 60255-25:2000

© 2011–2021 by Schweitzer Engineering Laboratories, Inc. All rights reserved.

All brand or product names appearing in this document are the trademark or registered trademark of their respective holders. No SEL trademarks may be used without written permission. SEL products appearing in this document may be covered by U.S. and Foreign patents.

Schweitzer Engineering Laboratories, Inc. reserves all rights and benefits afforded under federal and international copyright and patent laws in its products, including without limitation software, firmware, and documentation.

The information in this document is provided for informational use only and is subject to change without notice. Schweitzer Engineering Laboratories, Inc. has approved only the English language document.

This product is covered by the standard SEL 10-year warranty. For warranty details, visit [selinc.com](http://selinc.com) or contact your customer service representative.

EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

## SCHWEITZER ENGINEERING LABORATORIES, INC.

2350 NE Hopkins Court • Pullman, WA 99163-5603 U.S.A.  
Tel: +1.509.332.1890 • Fax: +1.509.332.7990  
[selinc.com](http://selinc.com) • [info@selinc.com](mailto:info@selinc.com)

