

## SEL-C256R IRIG-B Distribution Coaxial Cable with Terminating Resistor

RG58 Coaxial Cable for connecting a Satellite Clock to an SEL Device with a 9-Pin serial port IRIG-B input<sup>(1)</sup> with a 50 ohm terminating resistor between pins 4 and 6 on the 9-Pin Male connector.

Part Number:

**C 2 5 6 R -**

### Length


Specify in Feet with Leading Zeros (Example: 5 Feet = 005) - Max Length 130 Feet (Demodulated) and 425 Feet (Modulated)

### Accessories

BNC Tee, Female, Male, Female (equipment mount)*	2 4 0 - 1 7 9 9
BNC Tee, Female, Female, Male (equipment mount)*	2 4 0 - 1 8 0 1
BNC Tee, Female, Female, Female (in-line, 3-way splice)*	2 4 0 - 1 8 0 2

\*Additional Cost

<sup>(1)</sup> To verify your cable application, use the Cable Selector at <https://www.selinc.com/CableSelector/>.

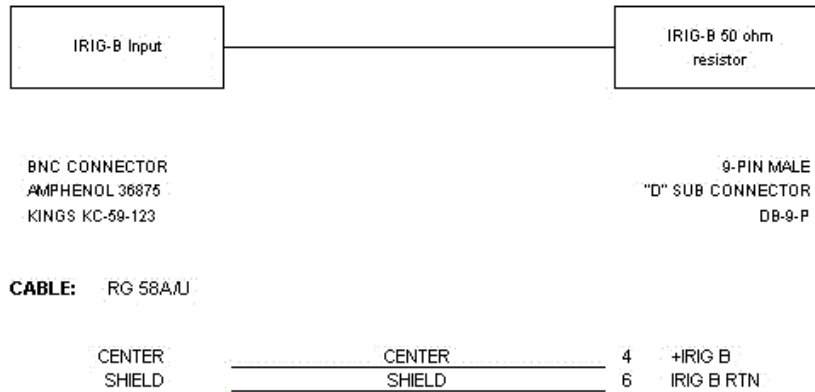

*Making Electric Power Safer, More Reliable, and More Economical®*

**SEL** SCHWEITZER ENGINEERING LABORATORIES, INC.

2350 NE Hopkins Court - Pullman, WA 99163 USA  
 Phone: +1.509.332.1890 - Fax: +1.509.332.7990